


SERIE 340














SH System Holz

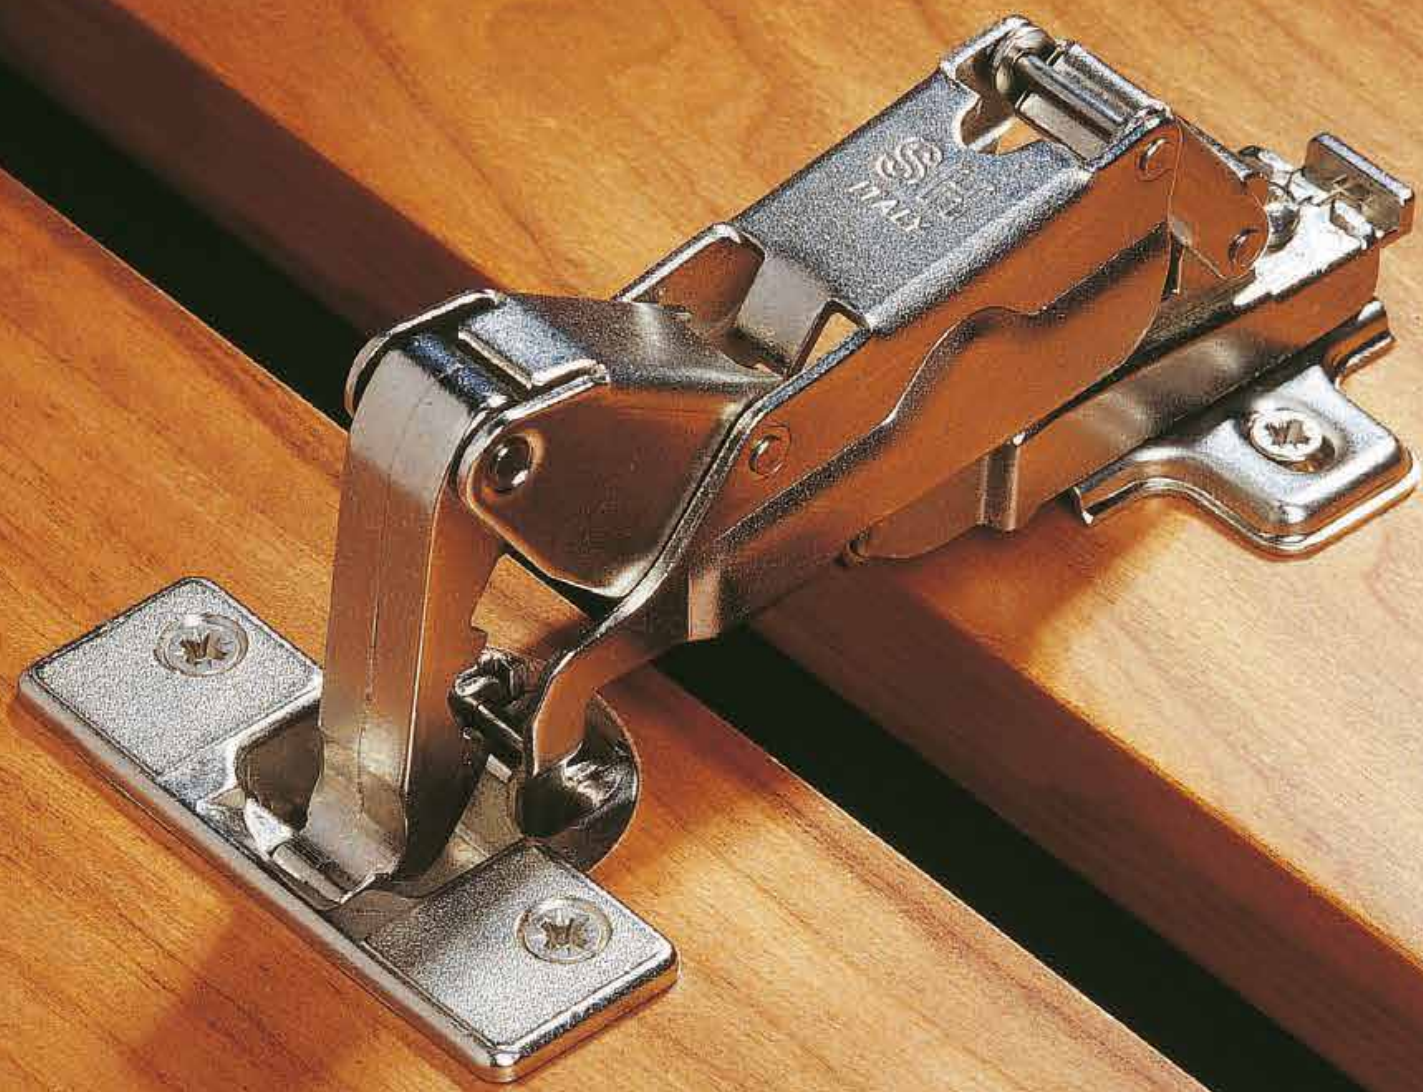

Gruppo Pozzi



SERIE 340

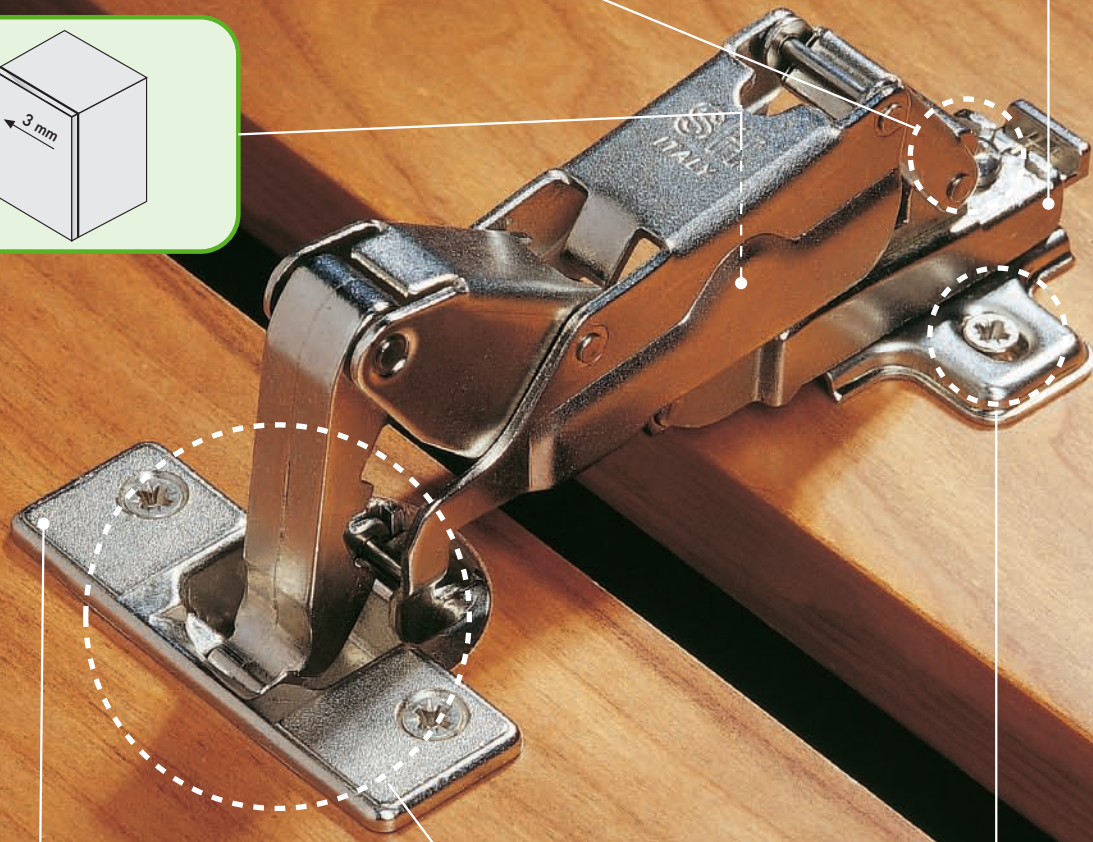




2500 fino a 20 Kg.
2000 fino a 16 Kg.
1600 fino a 13 Kg.
900 fino a 7 Kg.
600

Basi per serie 340 da pag. 71 a 75
Mounting plates for series 340 from page 71 to 75



1 BRACCIO COLLO BASSO OVERLAY DOOR

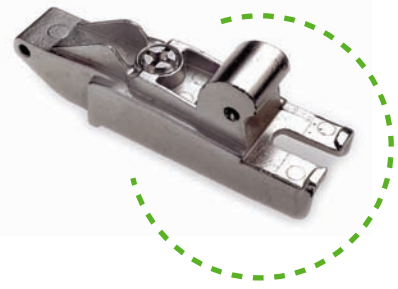




B	3	4	5	6	7	8	H
2	17	18	19	20	21	22	
3	16	17	18	19	20	21	
4	4	15	16	17	18	19	20
6	6	13	14	15	16	17	18
8	8	11	12	13	14	15	16
10	9	10	11	12	13	14	
14	5	6	7	8	9	10	

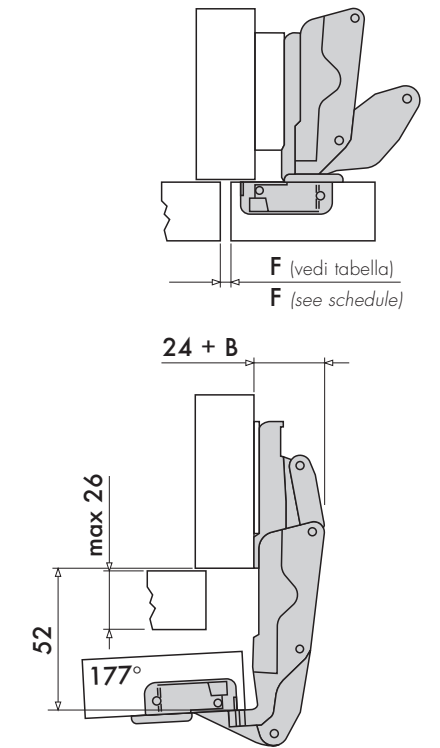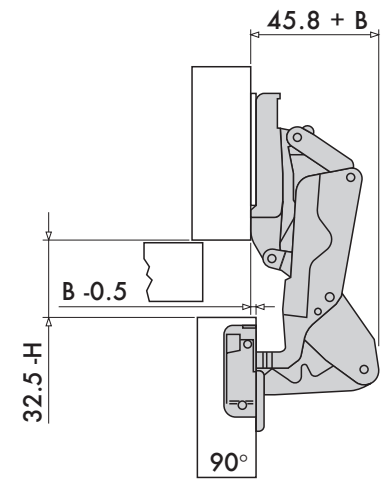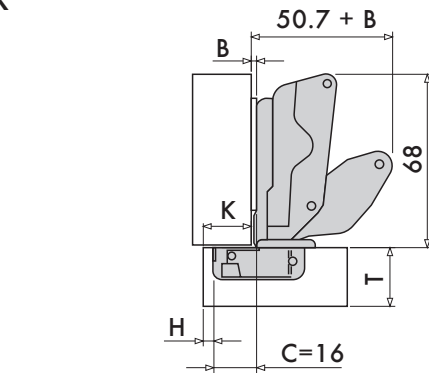


2 BRACCIO COLLO MEDIO HALF OVERLAY DOOR

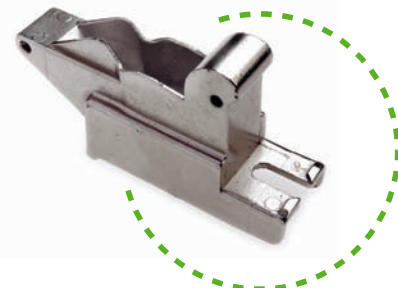


B	3	4	5	6	7	8	H
2	5	6	7	8	9	10	
3	4	5	6	7	8	9	
4	4	3	4	5	6	7	8
6	6	1	2	3	4	5	6
8	8	-1	0	1	2	3	4
10	-3	-2	-1	0	1	2	
14				-4	-3	-2	

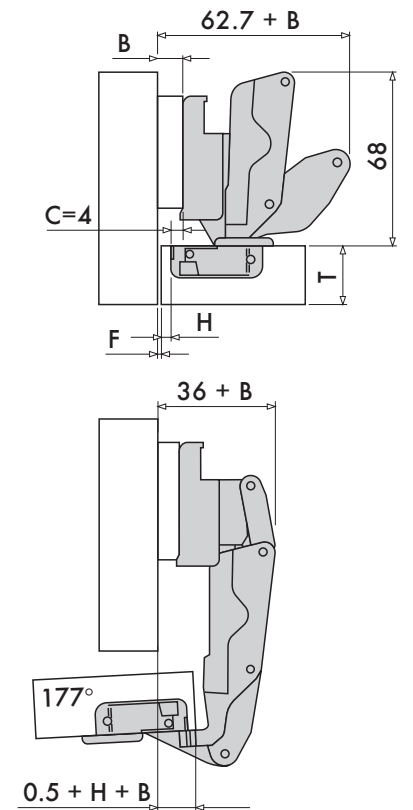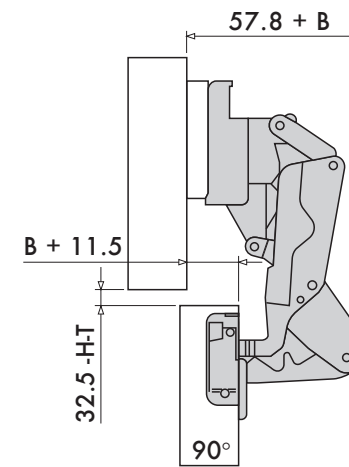

- Tabella per la determinazione di "F" in funzione dello spessore "T" e della distanza "H" mantenendo costante Z = 0.5 mm.
- Schedule to determine "F" according to the door thickness "T" to the boring distance "H" keeping Z = 0.5 mm constant.





T	20	21	22	23	24	25	26	F _{min}
3	0	0	0	0	0	3.2	6	
4	0	0	0	0	0	3	5.2	
5	0	0	0	0	0	2.7	4.4	
6	0	0	0	0	0	2.1	3.6	
7	0	0	0	0	0	1.6	2.8	
8	0	0	0	0	0	1.0	2.0	

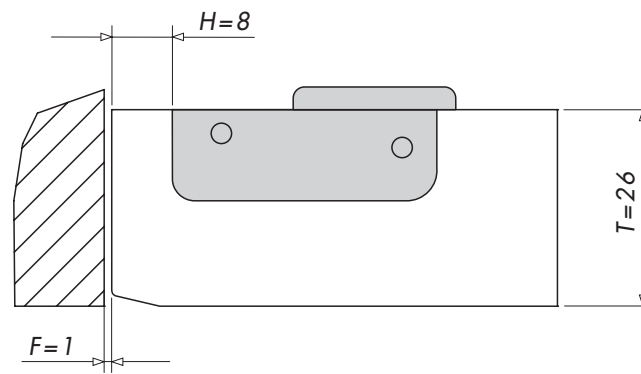


- Sezione massima dell'anta con una fuga (F) = 1 mm e una foratura (H) a 8 mm dal bordo.
- Maximum door section with opening clearance (F) = 1 mm and boring distance (H) 8 mm from door edge.

3 FISSAGGIO A VITE
SCREW-ON FIXING

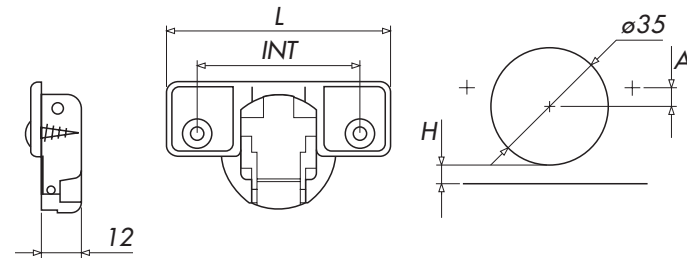

INT.	A	L
48	6	66
45	9.5	66
42	11	66
52	5.5	66

3/2 FISSAGGIO A PRESSIONE
KNOCK-IN FIXING

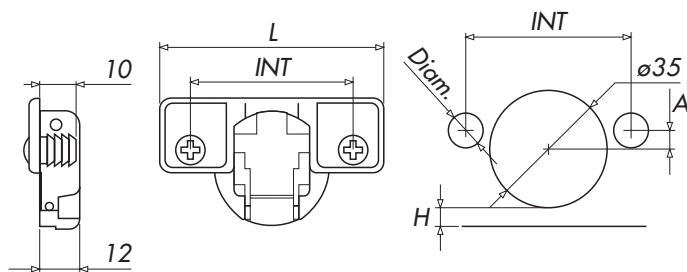

INT.	A	DIAM.	L
48	6	10	66
45	9.5	8	66
42	11	8	66
52	5.5	10	66

SERIE 340		3			
		48	42	45	52
1	Nichel	341310	341310-42	341310-45	341310-52
	Pz./Kg	100/16.7	100/16.7	100/16.7	100/16.7
1	Nichel	341310C	341310-42C	341310-45C	341310-52C
	Pz./Kg	100/18	100/18	100/18	100/18
2	Nichel	342310	342310-42	342310-45	342310-52
	Pz./Kg	100/17.5	100/17.5	100/17.5	100/17.5
2	Nichel	342310C	342310-42C	342310-45C	342310-52C
	Pz./Kg	100/18.8	100/18.8	100/18.8	100/18.8

SERIE 340		3/2			
		48	42	45	52
1	Nichel	341310/2	341310-42/2	341310-45/2	341310-52/2
	Pz./Kg	100/17.2	100/17.2	100/17.2	100/17.2
1	Nichel	341310/2C	341310-42/2C	341310-45/2C	341310-52/2C
	Pz./Kg	100/18.5	100/18.5	100/18.5	100/18.5
2	Nichel	342310/2	342310-42/2	342310-45/2	342310-52/2
	Pz./Kg	100/17.8	100/17.8	100/17.8	100/17.8
2	Nichel	342310/2C	342310-42/2C	342310-45/2C	342310-52/2C
	Pz./Kg	100/19.1	100/19.1	100/19.1	100/19.1