


SERIE 600




SH System Holz






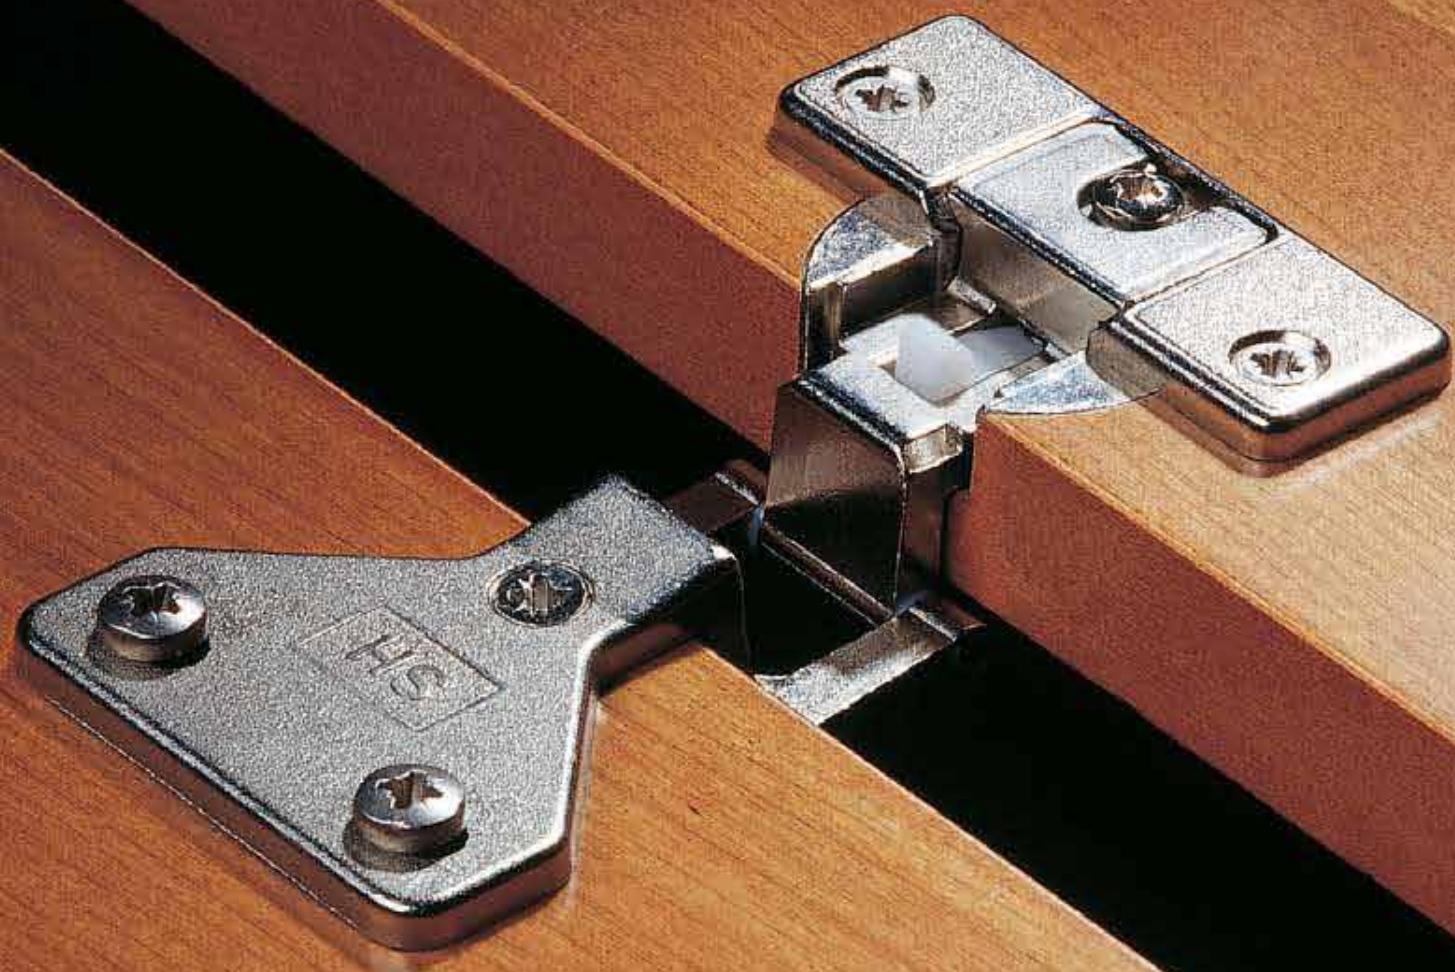


Gruppo Pozzi







SERIE 600




7 7.5 8.5




19 20 22

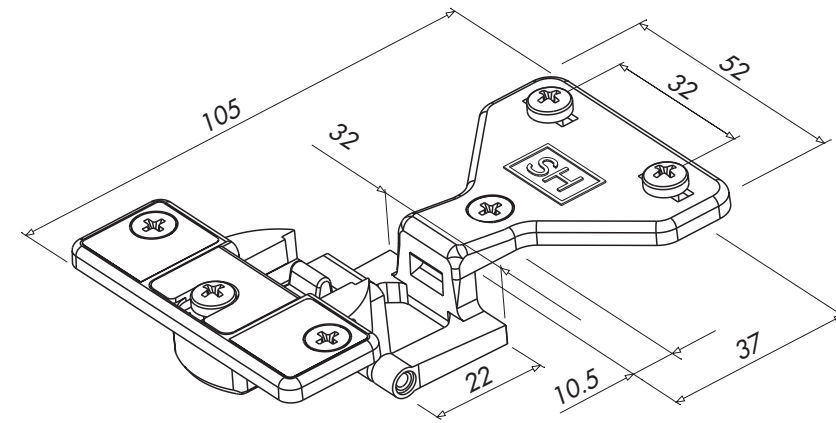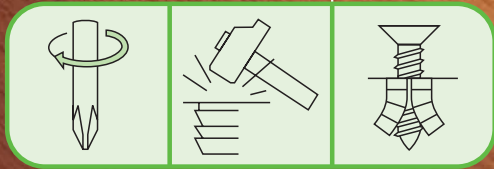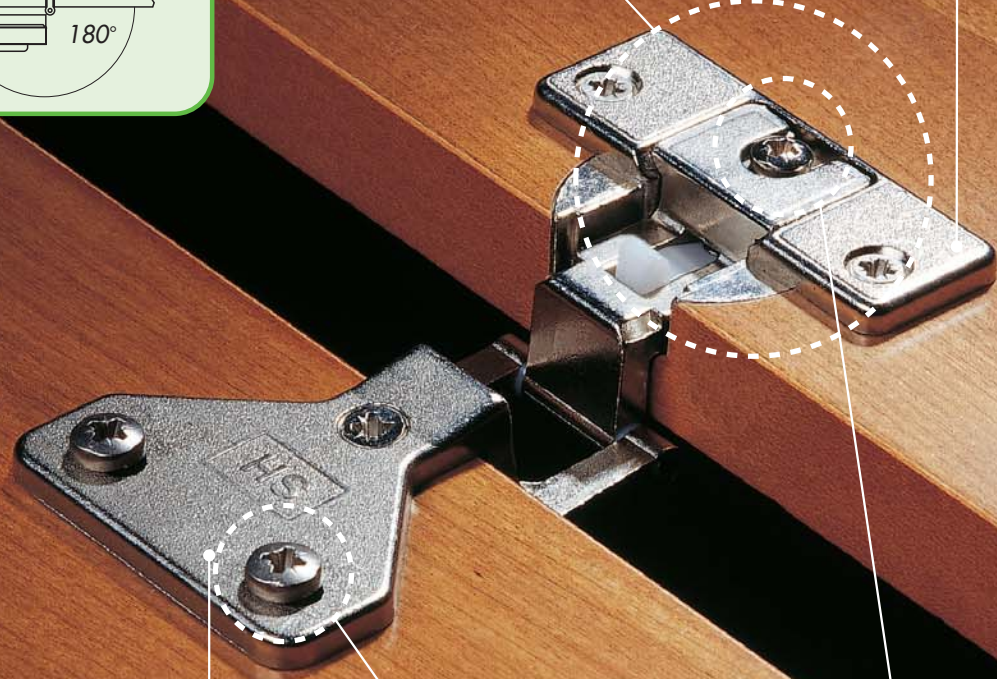


0 SORMONTO 7 mm 7 mm OVERLAY

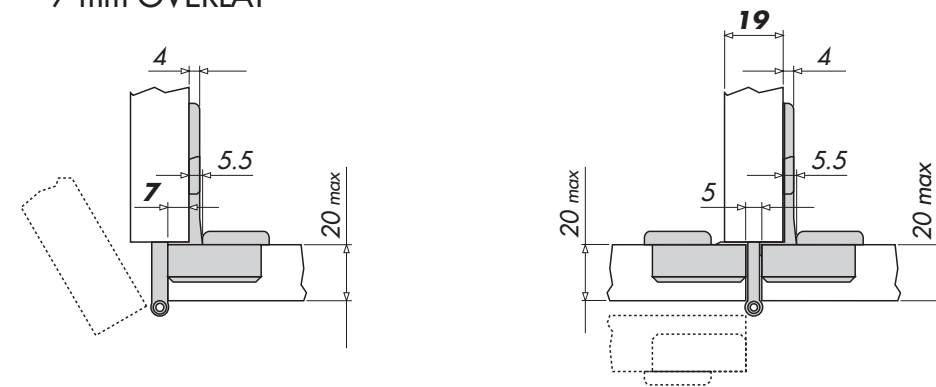

1 SORMONTO 7.5 mm 7.5 mm OVERLAY

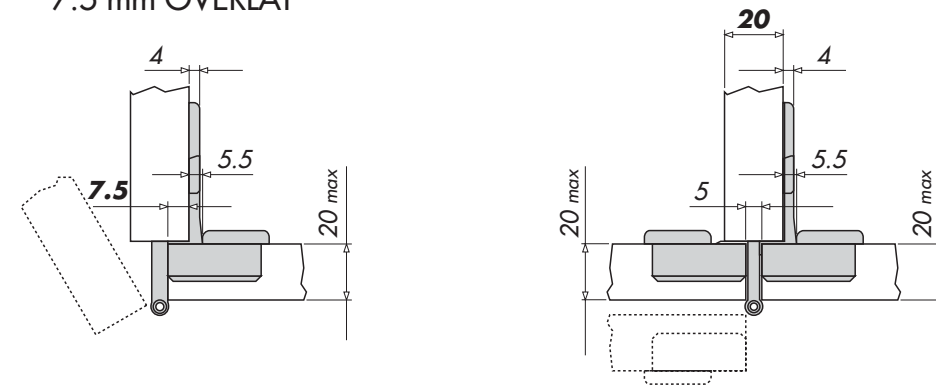




2 SORMONTO 8.5 mm 8.5 mm OVERLAY

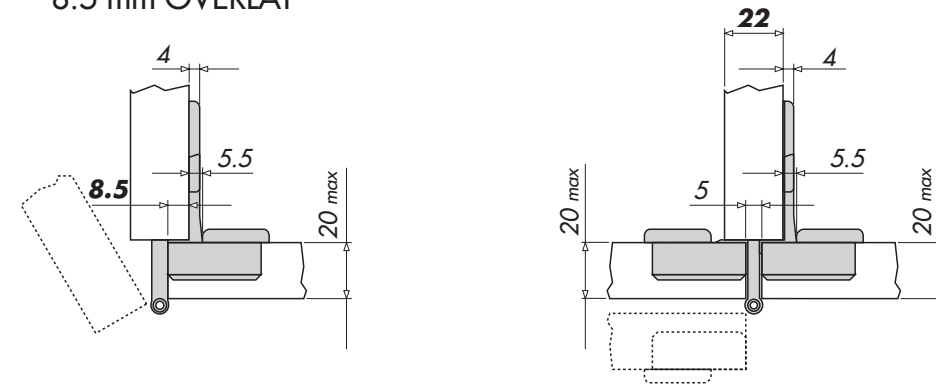




SH

- 2500 fino a 20 Kg.
- 2000 fino a 16 Kg.
- 1600 fino a 13 Kg.
- 900 fino a 7 Kg.
- 600


/R0

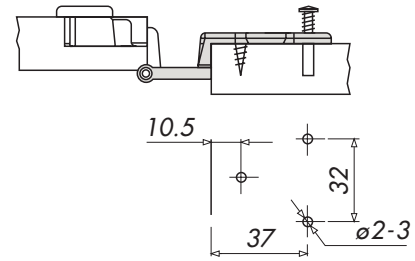


/E

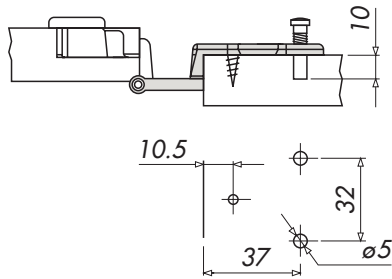




/R5

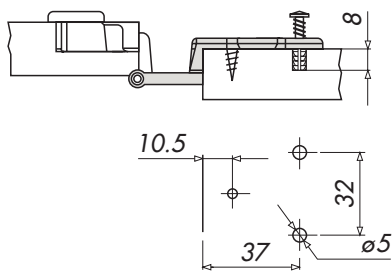

/R10


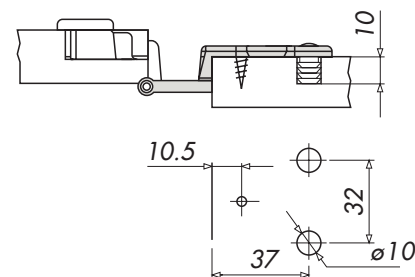


3 FISSAGGIO A VITE
SCREW-ON FIXING

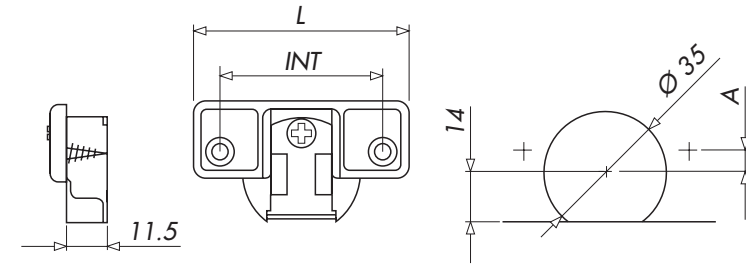



INT.	A	L
48	6	62
45	9.5	62
52	5.5	66

3/2 FISSAGGIO A PRESSIONE
KNOCK-IN FIXING

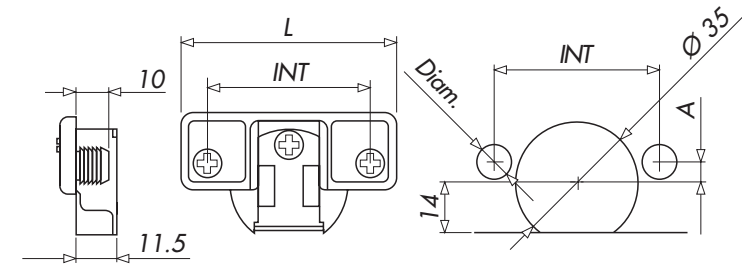



INT.	A	DIAM.	L
48	6	10	62
45	9.5	8	62
52	5.5	10	66


3 PER ANTE VETRO
FOR GLASS DOORS

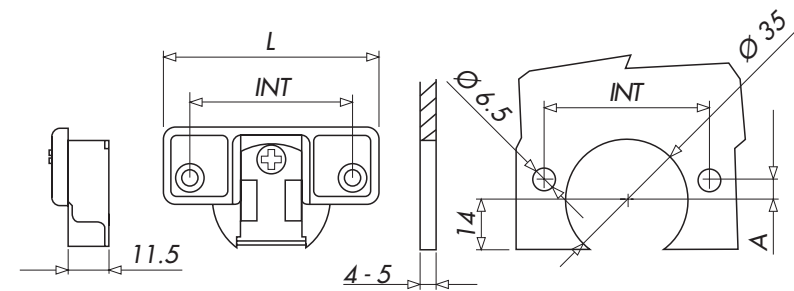

INT.	A	L
48	6	62

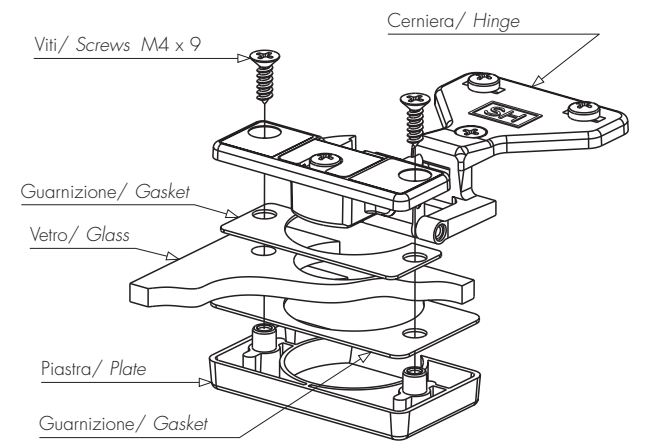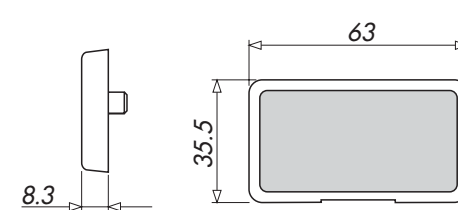

SERIE 600

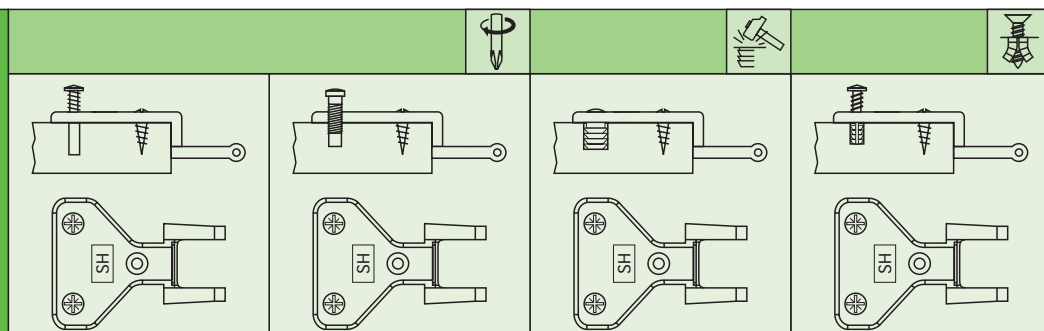


0		Nichel	63001S/R0	63001S/E	63001S/R10	63001S/R5
		Pz./Kg	200/15	200/15.5	200/15	200/15
1		Nichel	63101S/R0	63101S/E	63101S/R10	63101S/R5
		Pz./Kg	200/15	200/15.5	200/15	200/15
2		Nichel	63201S/R0	63201S/E	63201S/R10	63201S/R5
		Pz./Kg	200/15	200/15.5	200/15	200/15
		Nichel	63001D/R0	63001D/E	63001D/R10	63001D/R5
		Pz./Kg	100/10	100/10.5	100/10	100/10
1		Nichel	63101D/R0	63101D/E	63101D/R10	63101D/R5
		Pz./Kg	100/10	100/10.5	100/10	100/10
2		Nichel	63201D/R0	63201D/E	63201D/R10	63201D/R5
		Pz./Kg	100/10	100/10.5	100/10	100/10

CODICI GABBIE

CUPS ITEM NUMBERS

3			3/2		
C60348-1	C60345-1	C60352-1	C60348-1/2	C60345-1/2	C60352-1/2
Pz./Kg 200/6.5	Pz./Kg 200/6.5	Pz./Kg 200/6.8	Pz./Kg 200/7	Pz./Kg 200/7	Pz./Kg 200/7.3



- Piastre per ante vetro completa di guarnizioni e viti cod. art.: 43PR1S
- Cover cap for glass doors complete with gaskets and screws item number: 43PR1S

Pz. 400/16.8